

NAV PANEL IS DESIGNED TO BE SECURED TO A PANEL WITH 6 LOCKNUTS ON WELD STUDS.
O RING SEAL TO BE POSITIONED BETWEEN DEVICE AND FIXING PANEL PRIOR TO INSTALLATION.
OVERALL SIZES OF FIXING PANEL IS REPRESENTATIVE OF END USERS PRODUCT ONLY.


PLEASE ENSURE THAT A SUITABLE PANEL MATERIAL IS USED TO SUPPORT THE ATP UNIT.
THIS MUST PROVIDE SUFFICIENT RIGIDITY WHERE SEALING IS REQUIRED.
THE UNDER SIDE OF THE PANEL SHOULD BE FLAT, CLEAN & FREE OF
DEBRIS TO OPTIMISE SEALING.
THE TORQUE APPLIED TO THE LOCKNUT SHOULD NOT EXCEED 50cNm.



Storm Interface
1 Waterside Court,
Waterside Drive,
Langley,
Berkshire,
SL3 6EZ, England

tel: +44 (0) 1895 431421
fax: +44 (0) 1895 431132
email: sales@storm-interface.com
website: www.storm-interface.com

Drawing Status	Title			
Development	FRONT MOUNTING PLATE - AUDIO NAV EF			
Drawn By & Date	Material			
RC 26.6.2018	1.5mm STAINLESS STEEL			
Checked By & Date	Finish			
AC 15.02.2019	Unless Stated Tolerances			
Approved By & Date	0±	0.0±0.2	0.00±0.1	Angle Tol. ±0.25
© Keymat Technology Ltd. The content of this communication and/or document, including but not limited to images, specifications, designs, concepts and information is confidential and is not to be used for any purpose or disclosed to a third party without the express and written consent of Keymat Technology Ltd., Copyright 2018. All rights reserved.	Scale	Tool No.	Weight	Sheet
	1:1			1 of 2
Part No.		Issue		
149-00-33		1		

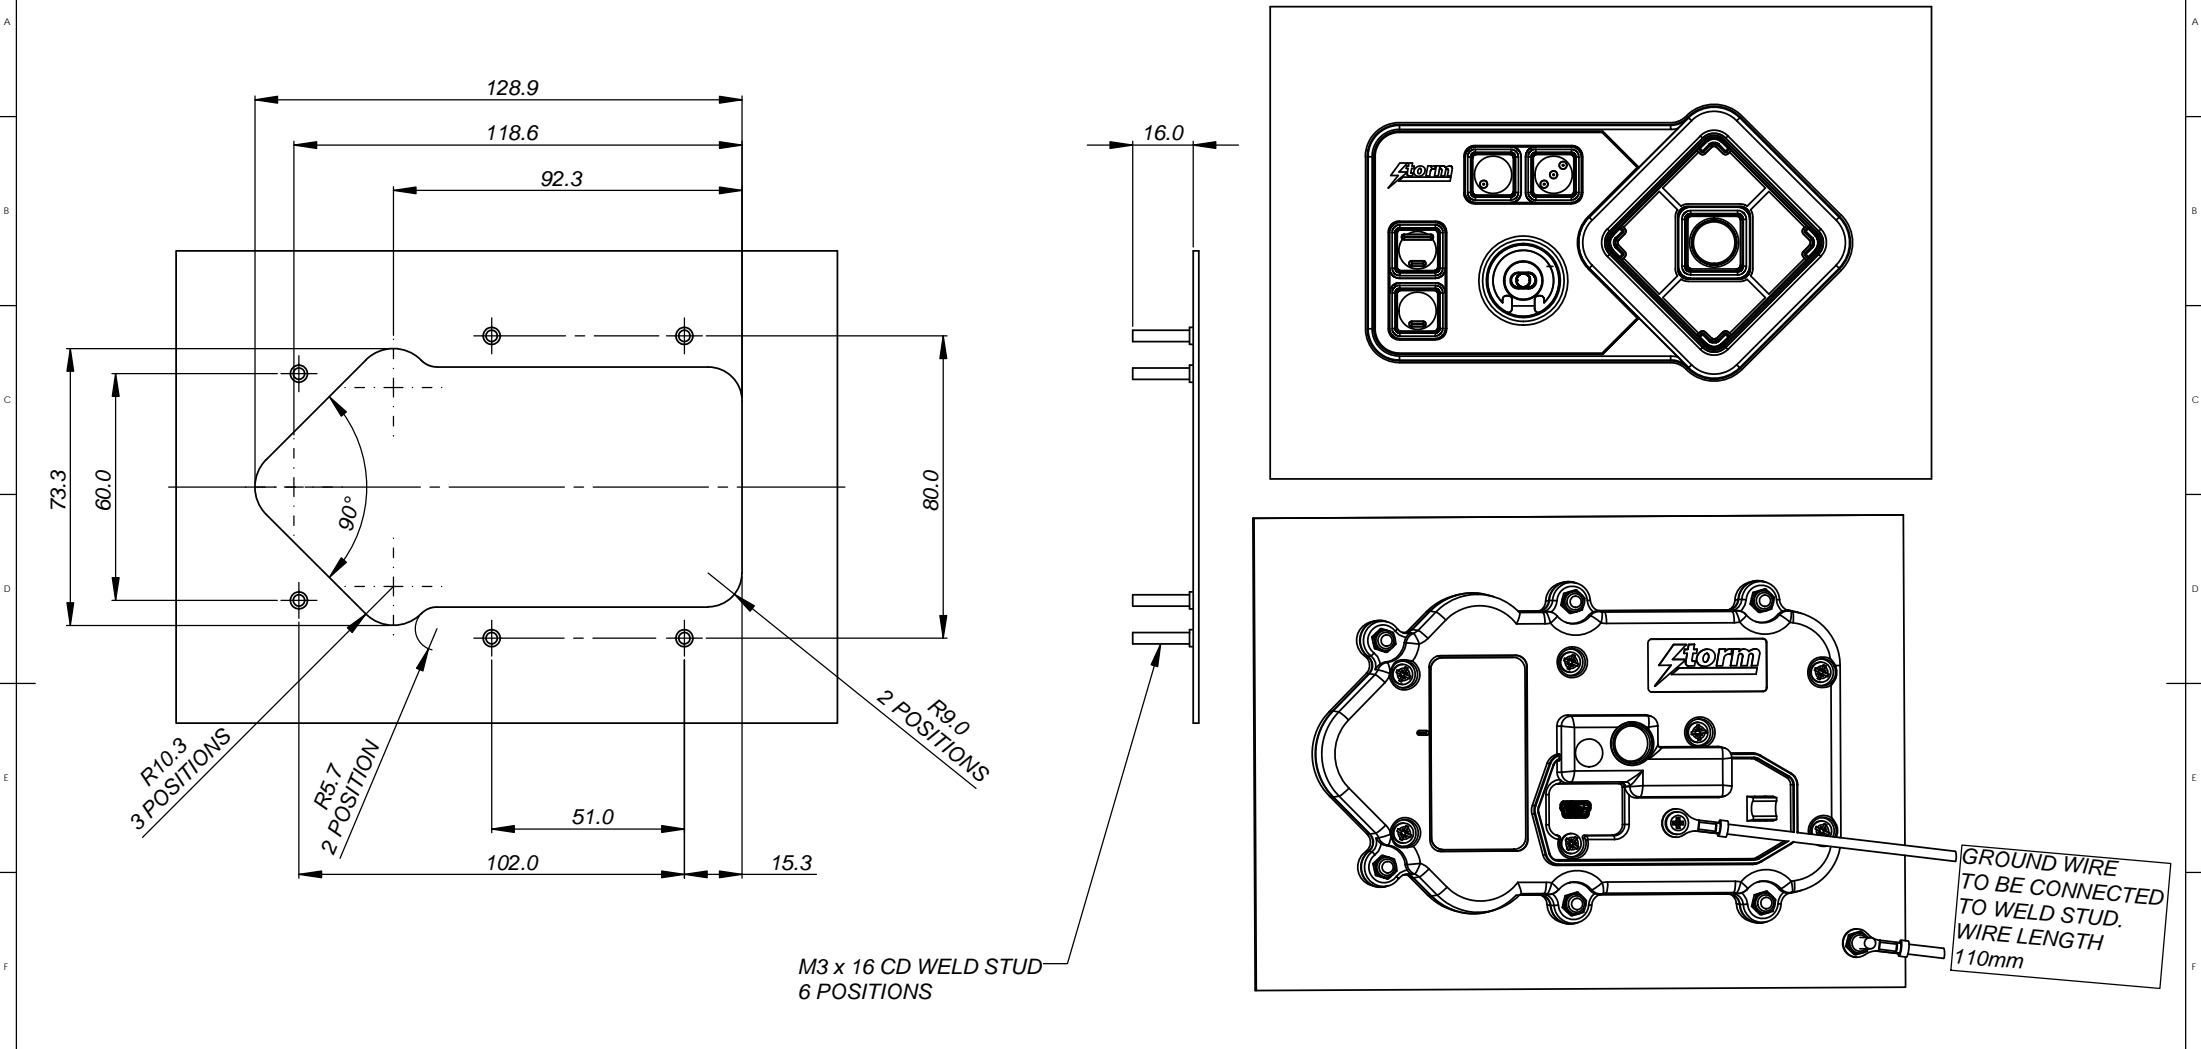


NAV PANEL IS DESIGNED TO BE SECURED TO A PANEL WITH 6 LOCKNUTS ON WELD STUDS. O RING SEAL TO BE POSITIONED BETWEEN DEVICE AND FIXING PANEL PRIOR TO INSTALLATION. OVERALL SIZES OF FIXING PANEL IS REPRESENTATIVE OF END USERS PRODUCT ONLY.

PLEASE ENSURE THAT A SUITABLE PANEL MATERIAL IS USED TO SUPPORT THE ATP UNIT. THIS MUST PROVIDE SUFFICIENT RIGIDITY WHERE SEALING IS REQUIRED. THE UNDER SIDE OF THE PANEL SHOULD BE FLAT, CLEAN & FREE OF DEBRIS TO OPTIMISE SEALING. THE TORQUE APPLIED TO THE LOCKNUT SHOULD NOT EXCEED 50cNm.

INSTALLATION INSTRUCTIONS FOR
1409-34003 AUDIONAV EF HORIZONTAL

VIEWS SHOWING FRONT AND REAR
OF PANEL WITH FIXING POSITIONS.
CABLE NOT SHOWN

H	NAV PANEL IS DESIGNED TO BE SECURED TO A PANEL WITH 6 LOCKNUTS ON WELD STUDS. O RING SEAL TO BE POSITIONED BETWEEN DEVICE AND FIXING PANEL PRIOR TO INSTALLATION. OVERALL SIZES OF FIXING PANEL IS REPRESENTATIVE OF END USERS PRODUCT ONLY.						Revision	Date	Revision	Date	Revision	Date	<div><div>Storm Interface 1 Waterside Court, Waterside Drive, Langley, Berkshire, SL3 6EZ, England</div><div>tel: +44 (0) 1895 431421 fax: +44 (0) 1895 431132 email:sales@storm-interface.com website:www.storm-interface.com</div></div>	Drawing Status	Title FRONT MOUNTING PLATE - AUDIO NAV EF																											
	Development						Material 1.5mm STAINLESS STEEL																																			
	Drawn By & Date						Finish																																			
	RC 26.6.2018						Unless Stated Tolerances 0± 0.0±0.2 0.00±0.1 Angle Tol. ±0.25																																			
	Checked By & Date						AC 15.02.2019																																			
A2	PLEASE ENSURE THAT A SUITABLE PANEL MATERIAL IS USED TO SUPPORT THE ATP UNIT. THIS MUST PROVIDE SUFFICIENT RIGIDITY WHERE SEALING IS REQUIRED. THE UNDER SIDE OF THE PANEL SHOULD BE FLAT, CLEAN & FREE OF DEBRIS TO OPTIMISE SEALING. THE TORQUE APPLIED TO THE LOCKNUT SHOULD NOT EXCEED 50cNm.						Revision	Date	Revision	Date	Revision	Date	1 ECN101728 19.07.2019	Approved By & Date	© Keymat Technology Ltd. The content of this communication and/or document, including but not limited to images, specifications, designs, concepts and information is confidential and is not to be used for any purpose or disclosed to a third party without the express and written consent of Keymat Technology Ltd., Copyright 2019. All rights reserved.				Part No. 149-00-33		Issue 1																					
	1						2						3						4						5						6						7					