



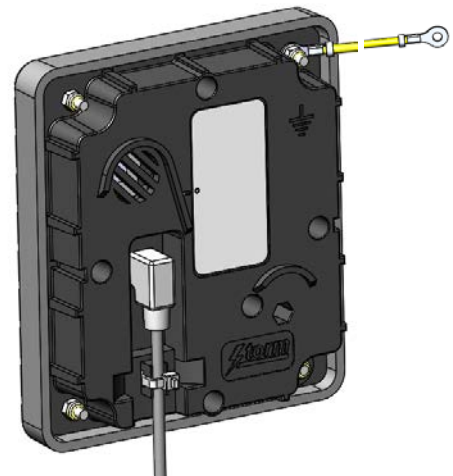


Nav-Pad™ Tactile Interface

Nav-Pad Tactile Interface. Specified to facilitate navigation of software applications by those with sensory or mobility impairment. This assistive device is sealed and toughened for use in both indoor and exposed outdoor applications.

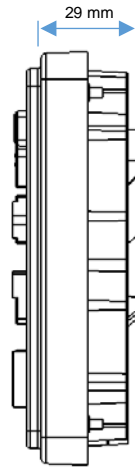

cable shown connected

UNDERPANEL FIXING ARRANGEMENT

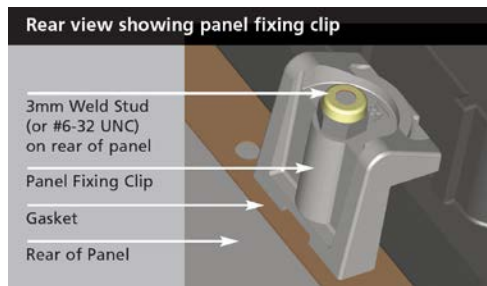

For underpanel installation refer to cutout drawing EZK-00-33 and use the panel fixing clips

CODE TABLE

Description	KEY LEGEND	TACTILE IDENTIFIER	KEY COLOR	USB Keycode
Home/Menu	<<	<	BLACK	F23
Help	?	⋮	BLUE	F17
End	>>	>	RED	F24
Back	BACK	<	WHITE	F21
Next	NEXT	>	WHITE	F22
Up		^	YELLOW	F18
Down		v	YELLOW	F19
Action		O	GREEN	F20

USB keycodes can be changed using the Windows Utility (free download from www.storm-interface.com)

Specification

Rating	5V ±0.25V (for USB 2.0)
Dimensions	Overall 105 mm x 119 mm
Panel Cutout	109.5 mm x 95.5 mm Rad 5mm corners Refer to cutout drawing EZK-00-33 Use 1.6 – 2.0mm thick panel
Ground	100mm Earth Wire with M3 ring terminal

Underpanel Gasket INCLUDED

Connection

Includes 2.0M USB Cable

Performance

Operational Temp	-20°C to +70°C
Weather Resistant	IP65 (front)
Impact Resistance	IK09 (10J Rating)
Shock & Vibration	ETSI 5M3
Operational Life	> 4 million cycles
Certification	CE / FCC / UL

Order Codes

EZ08-22301 NAV-PAD 8 KEY USB OUTPUT, 2M CABLE
6000-MK00 PANEL FIXING CLIPS (PACK OF 8 CLIPS)

See www.storm-interface.com for the full range of Nav-Pad™ Keypads