
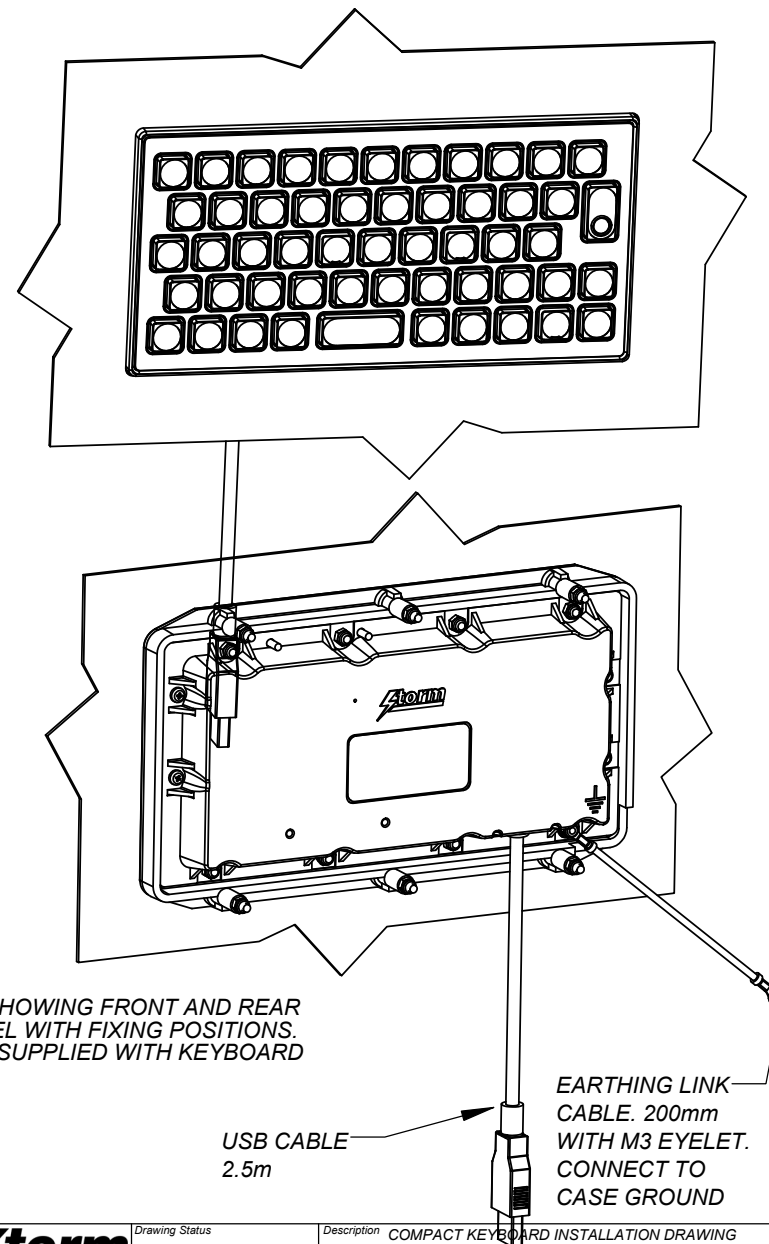


DO NOT SCALE

THIRD ANGLE PROJECTION

TO BE FREE OF ALL BURRS

DIMENSIONS IN MM

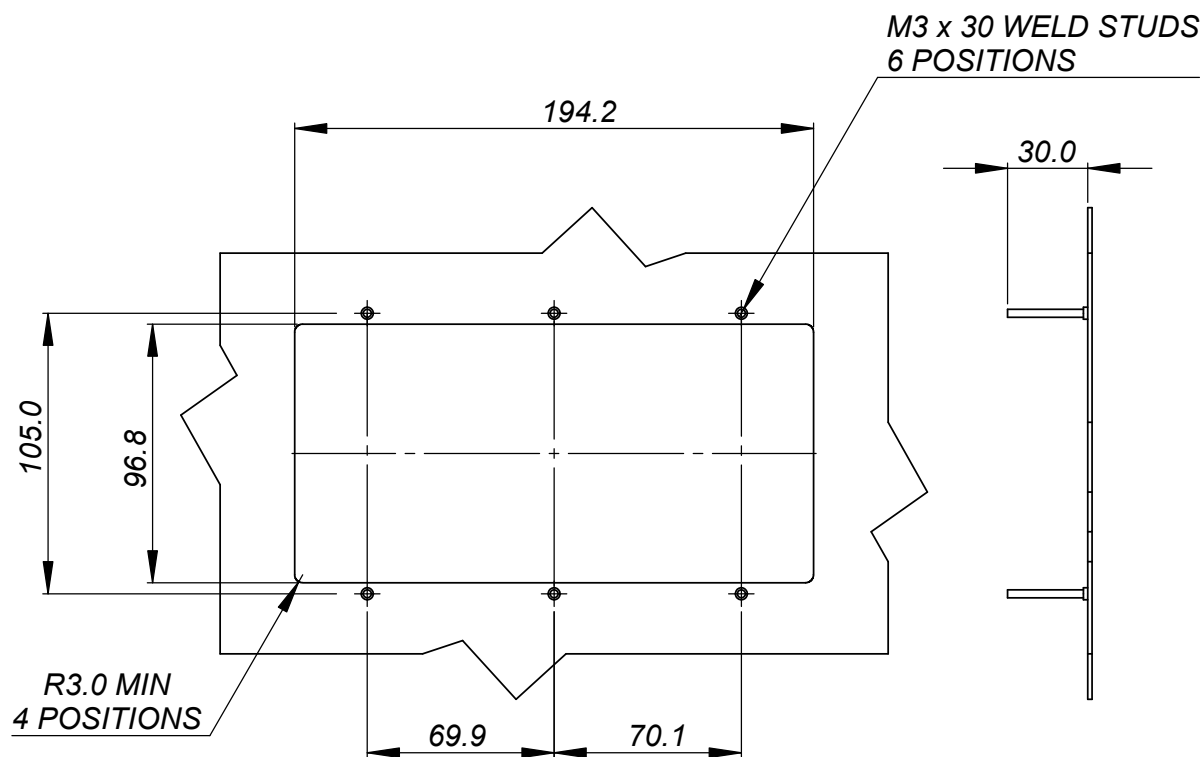

2205 COMPACT KEYBOARD IS DESIGNED TO BE SECURED TO A PANEL WITH 6 LOCKNUTS ON WELD STUDS. SUPPLIED GASKET TO BE POSITIONED BETWEEN KEYBOARD AND FIXING PANEL PRIOR TO INSTALLATION. OVERALL SIZES OF FIXING PANEL IS REPRESENTATIVE OF END USERS PRODUCT ONLY.

PLEASE ENSURE THAT A SUITABLE PANEL MATERIAL IS USED TO SUPPORT THE KEYBOARD. THIS MUST PROVIDE SUFFICIENT RIGIDITY WHERE SEALING IS REQUIRED. E.G. 1.6mm TO 3.0mm STEEL. THE UNDER SIDE OF THE PANEL SHOULD BE FLAT, CLEAN & FREE OF DEBRIS TO OPTIMISE SEALING. THE TORQUE APPLIED TO THE LOCKNUT SHOULD NOT EXCEED 50cNm.

Revision	Date	Revision	Date	Revision	Date
1	ECM101675	20/06/18			

Storm Interface
Storm Interface
14 Benlrick Court
Benlrick Road
West Drayton
Middlesex
UB7 7RQ, England
tel: +44 (0) 1895 431421
fax: +44 (0) 1895 431132
email: sales@storm-interface.com
website: www.storm-interface.com

Drawing Status	Description COMPACT KEYBOARD INSTALLATION DRAWING				
Drawn By & Date	Material				
JC 13.6.2018	Finish				
Checked By & Date	Unless Stated Tolerances				
ASC 20/6/18	0=± 0.0=± 0.00=± Angle Tol. 0±				
Approved By & Date	Scale 1:2 Tool No. Weight Sheet 1 of 1				
JS 21/6/18	© Keymat Technology Ltd. The content of this communication and/or document, including but not limited to images, specifications, designs, concepts and information is confidential and is not to be used for any purpose or disclosed to a third party without the express and written consent of Keymat Technology Ltd. Copyright 2018. All rights reserved.				
Part No.				Issue	
141-53-33				1	